

Product Features

Individual certificates provided with each sling

Flat Webbing slings have protected eye sections.




Flat Webbing Slings



Flat Webbing Slings



Round Slings

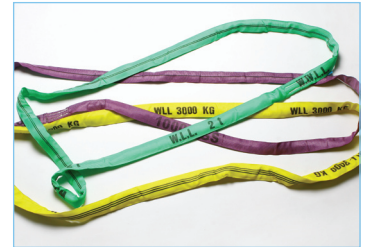

Round Slings

POLYESTER ROUND LIFTING SLINGS (FIBRE ENDLESS) EN 1492-2 FOS 7:1

DIMENSIONS, COLOURS & WLL

WLL	Width (mm)	Colour		Straight (WLL) Kgs 	Choked (WLL) Kgs 	Basket (WLL) Kgs 	7-45 degree basket (WLL) Kgs 	45-60 degree basket (WLL) Kgs 	PRODUCT NUMBER
1t	44.0	Violet 	1000	800	2000	1400	1000	RLS1T-L	
2t	46.0	Green 	2000	1600	4000	2800	2000	RLS2T-L	
3t	60.0	Yellow 	3000	2400	6000	4200	3000	RLS3T-L	
4t	67.0	Grey 	4000	3200	8000	5600	4000	RLS4T-L	
5t	78.0	Red 	5000	4000	10000	7000	5000	RLS5T-L	
6t	83.0	Brown 	6000	4800	12000	8400	6000	RLS6T-L	
8t	95.0	Blue 	8000	6400	16000	11200	8000	RLS8T-L	
10t	112.0	Orange 	10000	8000	20000	1400	10000	RLS10T-L	

Sold in 0.5m increments from 1m to 10m. Replace L with the length of the EWL - Effective Working Length

FLAT WEBBING SLINGS (DUPLEX DOUBLE PLY) EN 1492-1 FOS 7:1

DIMENSIONS, COLOURS & WLL

WLL	Width (inch)	Colour		Straight (WLL) Kgs 	Choked (WLL) Kgs 	Basket (WLL) Kgs 	7-45 degree basket (WLL) Kgs 	45-60 degree basket (WLL) Kgs 	PRODUCT NUMBER
1t	1	Violet 	1000	800	2000	1400	1000	FLS1T-L	
2t	2	Green 	2000	1600	4000	2800	2000	FLS2T-L	
3t	3	Yellow 	3000	2400	6000	4200	3000	FLS3T-L	
4t	4	Grey 	4000	3200	8000	5600	4000	FLS4T-L	
5t	5	Red 	5000	4000	10000	7000	5000	FLS5T-L	
6t	6	Brown 	6000	4800	12000	8400	6000	FLS6T-L	
8t	8	Blue 	8000	6400	16000	11200	8000	FLS8T-L	
10t	10	Orange 	10000	8000	20000	1400	10000	FLS10T-L	

Sold in 0.5m increments from 1m to 10m. Replace L with the length of the Sling - Bearing Point to Bearing Point